




We Make The Difference

WDROO SERIES WPF/WPX

Non-clogging self-priming
sewage pump 50Hz

hydroo®

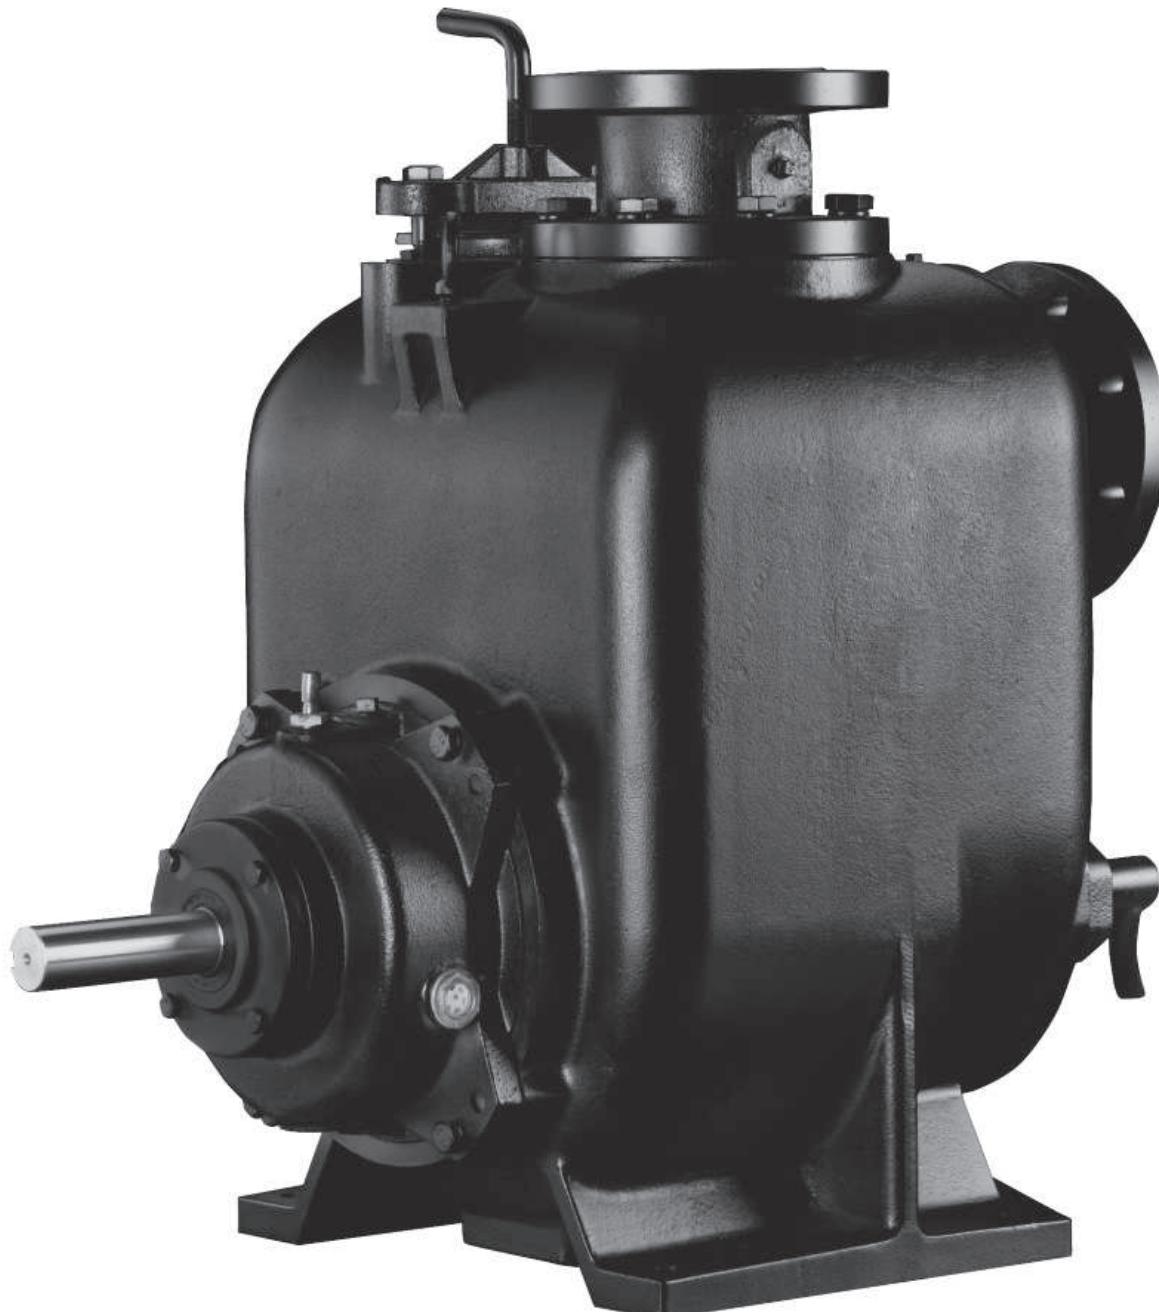

PRESENTATION

Hydroo Pump Industries SL is an enterprise specialised in the research, development and large-scale production of Stainless Steel centrifugal pumps. We have a vertical integration of the production processes, standing out stamping, welding and motor wiring in 6 value centers and production units. All of them with a high performance management on pump engineering and production quality.

HYDROO has set up a wide range of pumping solutions for many applications as building services, industry, irrigation and industrial process. Customers enjoy of the highest performance in booster sets and pressurization, fire-fighting sets, pumping of underground water, HVAC, drainage and sewage, utilities, desalination and OEM integrations. Versions in 50 Hz and 60 Hz are available, as well as any modification on materials, on request.

Global water challenges require excellence in pumping technologies

and close cooperation between pump designers, manufacturers and pump engineers. In order to better meet the customers' needs and requirements our company is facing an expansion of its operations worldwide, providing timely and effective services in more than 30 countries. With tight relationships in many regions, we're proud to introduce a new regional value center for Europe. We are based near Barcelona at the Girona industrial area. Hydroo is a trademark to forge excellent and successful business relationships with our value customers by means of an operative assembling unit and an application engineering unit. HYDROO trademark wants to symbolize the firm commitment for a high level service to our value partners.

At Hydroo we bet on a high level service to our value pump partners.

WPF WPX

**Non-clogging
self-priming
sewage pump**

Applications

**Rain water and common sewage
Industrial sewage water
Wine and sugar industry
Sewage water in the city**

Description

Back-pull-out construction convenient for maintenance and trouble shooting.

Daily maintenance can be performed rapidly by common head tools, saving time and labor.

Stable performance, reliable operation.

Performance range

Flow range: up to 700 m³/h


Head: up to 35 m

Temperature: up to 40 °C


Power: up to 75 kW

Standard material

Pump casing is made of cast iron or ductile cast iron, impeller can be cast iron or stainless steel

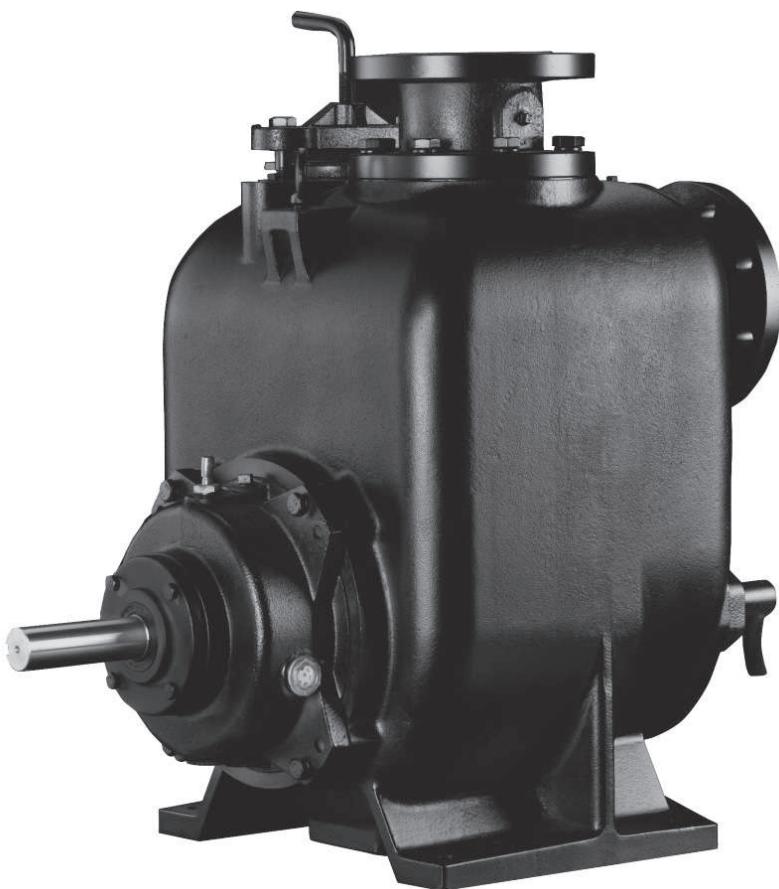

Performance scope

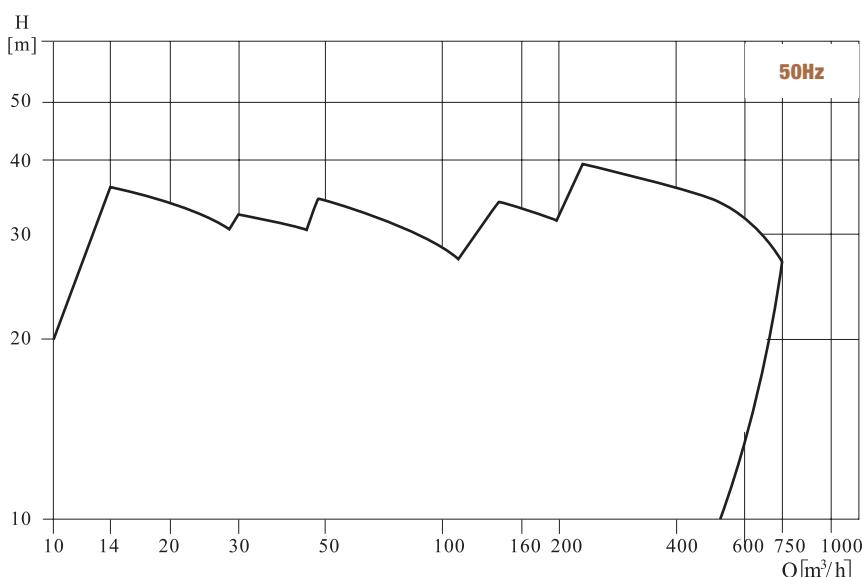

Features

- WP Non-clogging self-priming sewage pump is our latest developed product, and is suitable for the treatment project of municipal sewage and industrial sewage as well as stage treatment and concentrated treatment system of various sewages. It's known as "King of Self-priming Sewage Pump", and it is the most ideal new-generation sewage product.
- Stable performance, reliable operation.
 - Rapid self-priming, high suction head.
 - Back-pull-out construction: Convenient for maintenance and troubleshooting. Daily maintenance can be performed rapidly by common tools, saving time and labor.
 - Semi-open impeller structure and non-clogging design: Strong passing capacity. Diameter of maximum passing grain for WP-6 is 76mm.
 - Convenient usage: The pump can be mounted near cesspit, with only the suction pipe down in the liquid.(The pump shall be filled with water for first start).

Application


- Non-flammable and non-explosive liquid.
- Rain water and common sewage.
- Municipal drainage project, construction site, drainage station of people's air defense system.
- Industrial sewage of light industry, paper mill, textile, food processing plant, chemical industry, electric utility, mines, etc.
- Sewage discharge in the residential area.
- Sewage and deposit of water purifying system.
- Tanning industry, sewage of slaughter house, fish breeding in the river and pond.
- Wine and sugar industry.
- Discharge not strongly corrosive but seriously polluted sewage.

Operating limits

- Liquid temperature: 0~40 °C, medium density $\leq 1.2 \times 10^3 \text{ kg/m}^3$, pH5~9.
- Volume ratio of solids in the medium $\leq 2\%$.
- Diameter of maximum grain: WP-2 38mm, WP-3 63mm, WP-4/WP-6/WP-8/WP-10 76mm.
- Ambient temperature: $\leq 40^\circ\text{C}$.
- Altitude: Max. 1,000m.
- Flow range: 10m³/h~750m³/h.
- Head range: 3m~38m.
- Power: 1.1 kW~90kW.
- Max. Working pressure: See Performance Curve.
- Max. Suction head: See Performance Table.

Installation conditions

- Suction pipe can be soft pipe or hard pipe, the material of pipes shall be suitable for the pumped liquid. Soft pipe shall be hard enough to prevent from flat when suction.
- Suction pipe shall be short and straight, use less joints and accessories as less as possible. For joints, the radius shall be bigger.
- The distance between the submersible suction pipe in the sump and the wall of the sump shall be 1.5 times than the radius of the pipe. Suction pipe shall not installed in the sump near the whirlpool. If there is, there shall be one baffle between suction pipe and water. The distance shall be 1.5times than the radius of the pipe.
- If there are two suctions in the sump, the pipe distance shall be three times than the radius of the pipe.
- Submersible depth of the submersible suction pipe:
The submersible depth of the suction pipe relates to the flow rate in the pipe. See drawing one
To reduce the submersible depth, we can enlarge the pipe radius or reduce the flow rate of the water. We can use increasing joint to enlarge the radium pipe. The suggested times is 1.3 times to 1.5 times.
- In flooded status, there is inlet pressure. It shall not exceed 50% of the max. working pressure.
- If use the strainer, the face area of the strainer shall be 4 to 6 times than the radius of the pipe. And ensure the max. dia. of the strainer hole to pass granules shall be less than the granule pump allowed.

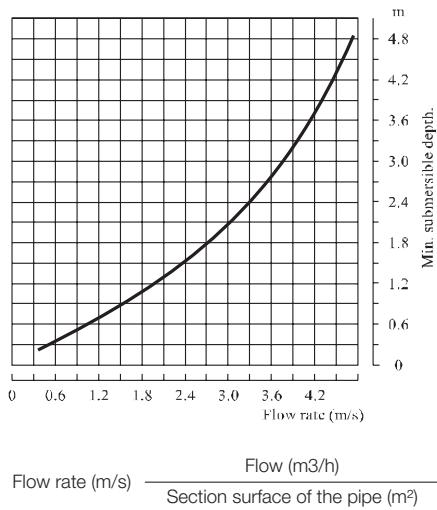


Suggested suction pipe submersible depth vs flow rate

Definition of model

Hydraulic part description				Motor description					
WP	F	4	(1150)	5'5	T	2340	5	4	IE3
									Motor efficiency (According IEC60034)
									Number of poles
									5: 50 Hz 6: 60 Hz
									Rated voltage (x10) (V)
									S: one phase T: three phases
									Power P2 (kW)
									RPM for whole pump (Baseshift pump omitted)
									Inlet and outlet dimensions: 4"
									F: Cast iron impeller X: SS304 impeller N: SS316 impeller
									Self-priming sewage pump

Section drawing

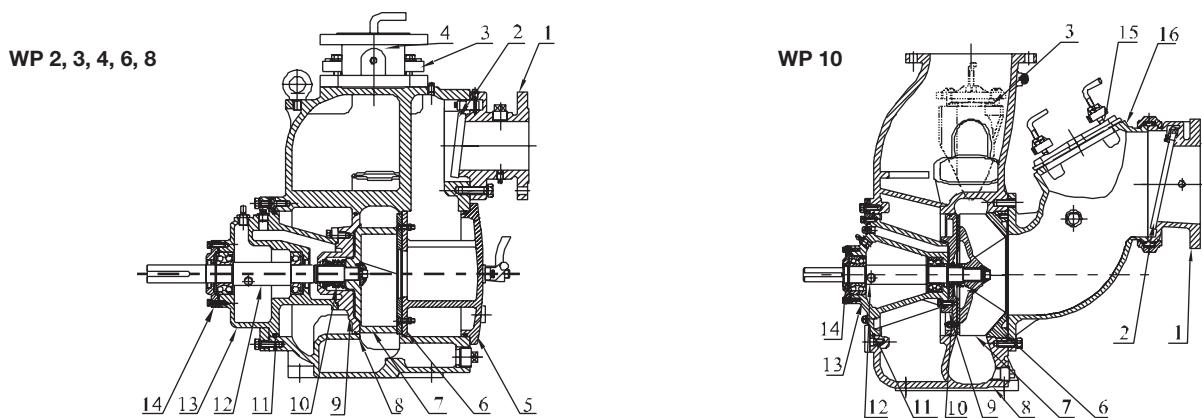


Material

Nº	Parts	Material
1	Suction Inlet	Cast iron
2	Flap Valve	NBR + Carbon steel
3	Infusion Cover	Cast iron
4	Discharge Outlet	Cast iron
5	End Cover	Cast iron
6	Wear Plate	Carbon steel
7	Impeller	DCI Cast steel
8	Volute	Cast iron
9	Impeller Cover	Cast iron
10	Mechanical Seal	WC/ WC
11	O-Ring	NBR/FPM
12	Shaft	Stainless steel
13	Bearing Body	Cast iron
14	Bearing Cover	Cast Iron
15	Inlet cover	Cast iron
16	Inlet	Cast iron

WP 2

Performance curve

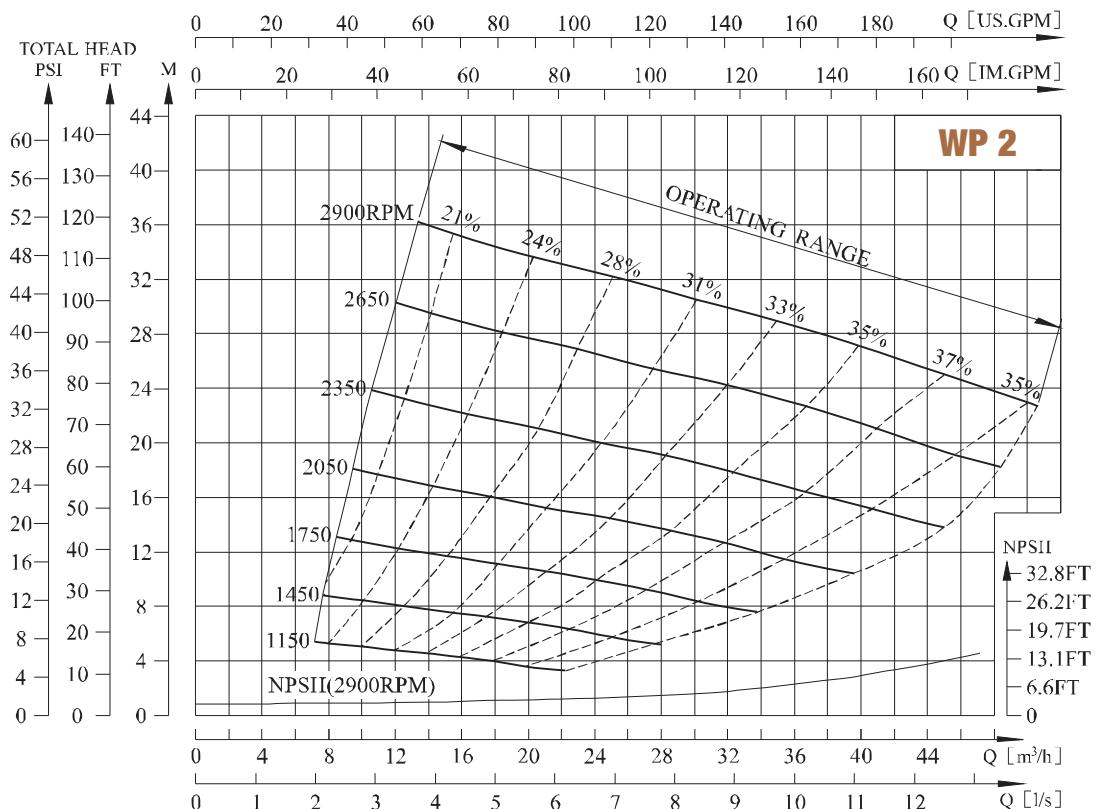

Performance table

Model	PRM	Q		H	Motor		Inlet &Outlet	Max. Solids (mm)	Max. Suction Head (m)
		(m³/h)	(l/s)		(kW)	(hp)			
WP-2	1150	15	4.2	4.0	1.1	1.5	50 (2')	38	5.0
	1450*	20	5.6	6.5	1.5	2			6.5
	1750	25	6.9	9.5	3	4			6.5
	2050	28	7.8	13.5	4	5.5			6.5
	2350	32	8.9	18.0	7.5	10			6.5
	2650	35	9.7	23.0	7.5	10			6.5
	2900*	40	11.1	27.0	9.2	12.5			6.5

Operating table


Model	PRM	Q (m³/h)	10	12.5	15	17.5	20	25	30	35	40	45
WP-2	1150	H (m)	5.1	4.7	4.0	3.8	3.5					
	1450*		8.4	8.1	7.6	7.3	6.5	5.8				
	1750		12.6	12.2	11.8	11.3	10.8	9.5	8.5			
	2050		17.9	17.2	16.7	16.1	15.5	14.5	13.2	11.6		
	2350			23.2	22.5	21.8	21.2	19.9	18.6	17.2	15.3	
	2650			30.1	29.2	28.4	27.6	26.2	24.8	23.0	21.6	19.4
	2900*				35.6	34.5	33.7	32.1	30.4	29	27.0	25.3

Note: (Suit for WP 1, 3, 4, 6, 8, 10)

- 1) The performance is based on pumping clean water under normal temperature and min suction head is measured on sea level. For different installation way of pump, pump performance vary from flow rate, specific gravity, altitude, temperature. If the specific gravity of pumped medium is bigger than 1.2kg/dm³, please contact us.
- 2) For the rpm with (*) in the table, pump can be coupled with Y2 B3 series standard motor.
- 3) For other rpm, pump can be driven by triangle belt sheave.

WP 3

Performance curve

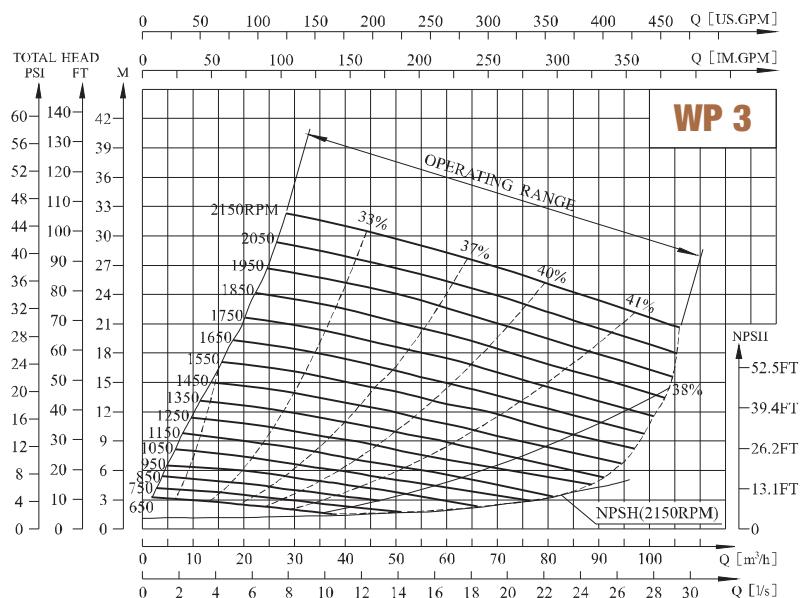

Performance table


Model	PRM	Q		H	Motor		Inlet &Outlet	Max. Solids (mm)	Max. Suction Head (m)
		(m³/h)	(l/s)		(kW)	(hp)			
WP-3	650	25	6.9	2	0.75	1	80 (3')	63	1.5
	750*	30	8.3	3	1.5	2			1.8
	850	32.5	9.0	4	1.5	2			2.4
	950*	40	11.1	4.5	1.5	2			3.0
	1050	42.5	11.8	5.5	3	4			4.0
	1150	45	12.5	7	4	5.5			4.9
	1250	50	13.9	8	4	5.5			5.5
	1350	52.5	14.6	10	5.5	7.5			5.8
	1450*	55	15.3	11.5	5.5	7.5			6.4
	1550	60	16.7	12.5	7.5	10			6.4
	1650	65	18.1	14.5	11	15			6.7
	1750	70	19.4	16	11	15			6.7
	1850	72.5	20.1	18	15	20			7.6
	1950	75	20.8	20	15	20			7.6
	2050	80	22.2	22.5	18.5	25			7.6
	2150	85	23.6	24.5	18.5	25			7.6

Operating table

Model	PRM	Q (m³/h)	10	20	30	40	50	60	70	80	90	100
WP-3	650	H (m)	2.9	2.5	2.0							
	750*		3.9	3.5	3.0	2.3						
	850		5.2	4.7	3.9	3.4						
	950*		6.4	6.0	5.2	4.5	3.8					
	1050		7.9	7.4	6.7	5.9	5.0	4.3				
	1150		9.7	9.0	8.3	7.4	6.5	5.6				
	1250		11.3	10.7	10.0	9.1	8.0	7.1	6.2			
	1350		12.6	11.9	11.0	10.0	9.0	7.7				
	1450*		14.7	14.0	12.9	12.0	10.8	9.6	8.3			
	1550		16.8	16.1	15.1	14.0	12.5	11.7	10.4	9.1		
	1650		19.3	18.5	17.4	16.2	15.0	13.6	12.3	11.1		
	1750			20.9	19.7	18.7	17.5	16.0	14.5	13.2	11.8	
	1850				23.5	22.5	21.2	20.0	18.4	16.9	15.3	14.0
	1950					26.2	25.3	24.1	22.7	21.0	19.6	17.9
	2050						29.0	28.0	26.8	25.3	24.0	22.5
	2150							32.1	31.0	29.7	28.2	26.8

WP 4

Performance curve

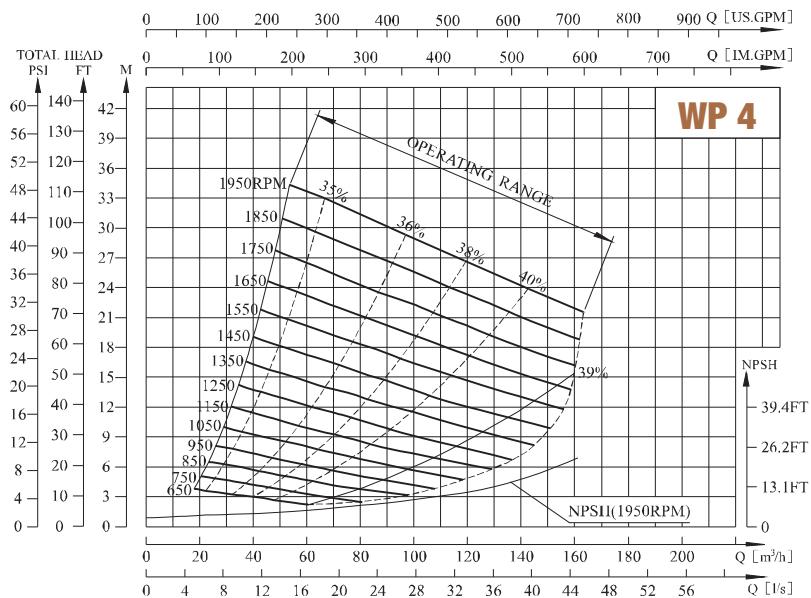

Performance table


Model	PRM	Q		H (m)	Motor		Inlet &Outlet	Max. Solids (mm)	Max. Suction Head (m)
		(m³/h)	(l/s)		(kW)	(hp)			
WP-4	650	40	11.1	3	1.5	2	100 (4")	76	1.5
	750*	45	12.5	4	1.5	2			2.4
	850	53	14.7	5	2.2	3			4.9
	950*	60	16.7	6	3	4			5.8
	1050	65	18.1	7.5	5.5	7.5			6.7
	1150	72	20.0	9	5.5	7.5			7.3
	1250	80	22.2	10.5	7.5	10			7.6
	1350	85	23.6	12.5	11	15			7.6
	1450*	100	27.8	13.5	11	15			7.6
	1550	110	30.6	15.5	15	20			7.6
	1650	115	31.9	18	18.5	25			7.6
	1750	120	33.3	20	22	30			7.6
	1850	130	36.1	22.5	30	40			7.6
	1950	135	37.5	25	30	40			7.6

Operating table

Model	PRM	Q (m³/h)	20	32	48	64	80	96	112	128	144	160
WP-4	650	H (m)	3.8	3.3	2.6							
	750*		4.5	3.7	3.0							
	850		6.0	5.3	4.5	3.5						
	950*		7.5	6.5	5.7	5.0						
	1050		9.7	8.7	7.8	6.8	5.9					
	1150		11.9	10.8	9.9	8.8	7.6					
	1250		14.2	13.2	12.0	10.8	9.5	8.4				
	1350		16.7	15.7	14.3	13.1	11.8	10.5				
	1450*			18.0	16.5	15.5	14.0	12.5	11.5			
	1550			20.9	19.8	18.3	16.9	15.4	13.8	12.6		
	1650			24.3	22.9	21.1	19.8	18.1	16.3	15.0		
	1750			27.6	26.2	24.4	22.9	21.3	19.3	17.5	16.2	
	1850			31.0	29.8	27.7	26.1	24.4	22.5	20.5	18.7	
	1950			34.5	33.4	31.5	29.4	27.7	25.7	23.5	21.7	

WP 6

Performance curve

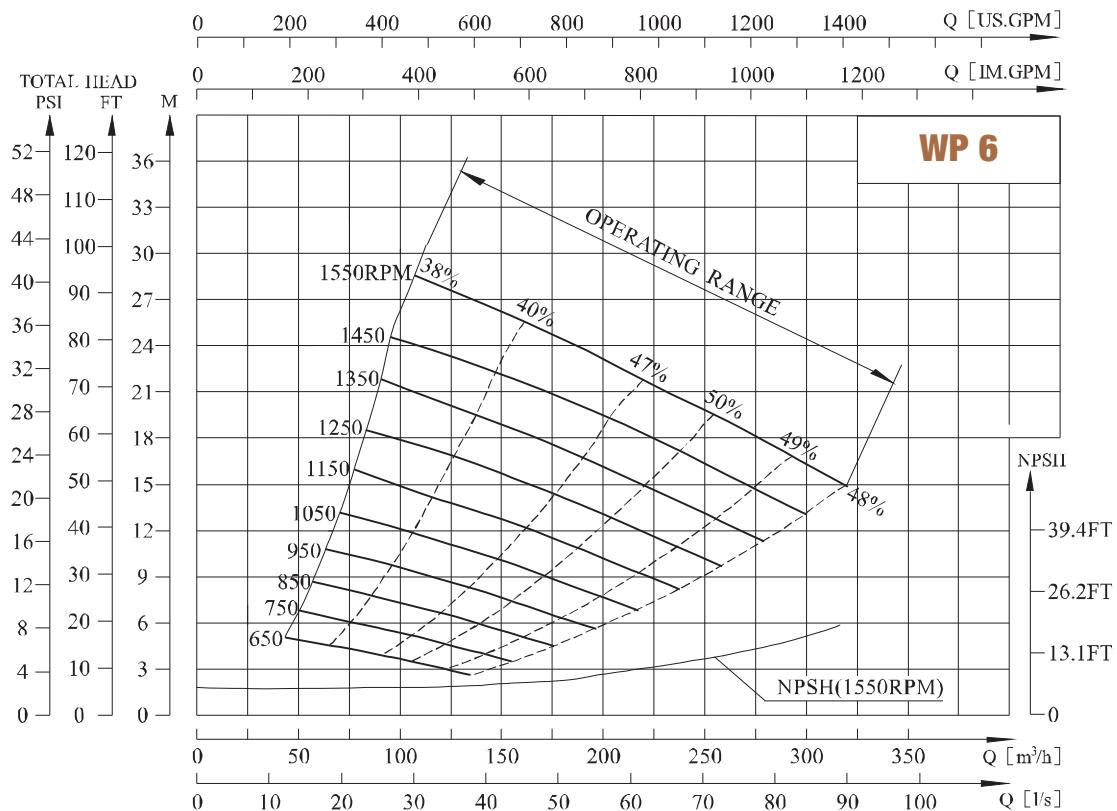

Performance table


Model	PRM	Q		H	Motor		Inlet &Outlet	Max. Solids (mm)	Max. Suction Head (m)
		(m^3/h)	(l/s)		(kW)	(hp)			
WP-6	650	100	27.8	3.5	3	4	150 (6')	76	2.4
	750*	125	34.7	4.5	4	5.5			2.7
	850	150	41.7	5.5	7.5	10			3.6
	950"	160	44.4	7.5	7.5	10			4.2
	1050	180	50.0	9.0	11	15			5.5
	1150	200	55.6	10.0	15	20			6.4
	1250	220	61.1	12.5	22	30			6.4
	1350	230	63.9	15.0	30	40			6.7
	1450*	250	69.4	17.0	30	40			7.0
	1550	280	77.8	18.0	37	50			7.6

Operating table

Model	PRM	Q (m^3/h)	50	80	120	150	180	210	240	270	300
WP-6	650		5.0	4.2	3.1						
	750*			6.0	4.7	3.6					
	850			8.0	7.0	5.5					
	950"			11.0	9.5	7.5	6.8				
	1050			13.0	11.0	10.0	9.0	7.5			
	1150			16.0	14.0	12.8	11.2	10.0	8.0		
	1250				17.0	15.5	14.0	12.7	10.5		
	1350				20.5	19.0	17.5	15.5	14.0	12.0	
	1450*				24.0	22.0	21.0	19.0	17.0	15.0	13.0
	1550				28.0	26.0	24.5	22.7	20.5	18.5	16.5

WP 8

Performance curve

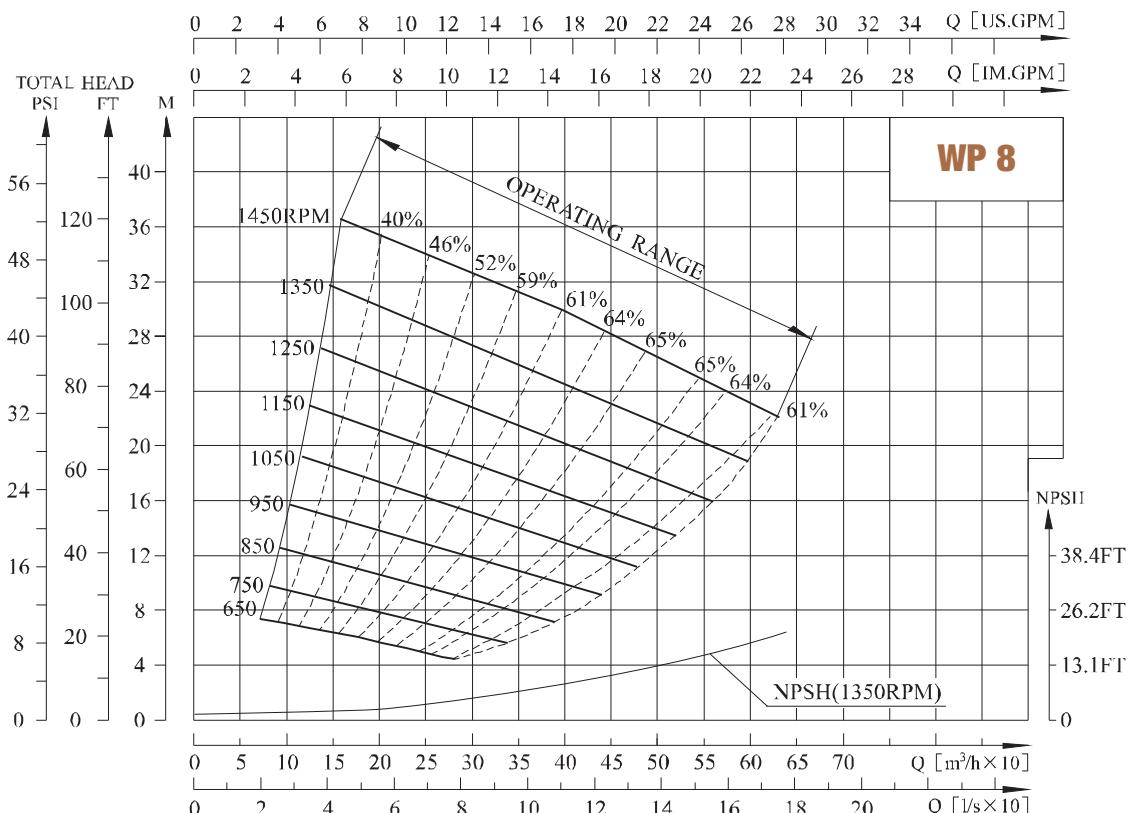

Performance table


Model	PRM	Q		H	Motor		Inlet &Outlet	Max. Solids (mm)	Max. Suction Head (m)
		(m³/h)	(l/s)	(m)	(kW)	(hp)			
WP-8	650	200	55.6	6	7.5	10	200 (8')	76	2.7
	750*	230	63.9	8	11	15			3.7
	850	260	72.2	10	15	20			4.6
	950*	300	83.3	12	22	30			5.2
	1050	320	88.9	15	30	41			6.1
	1150	350	97.2	18	37	50			6.4
	1250	400	111.1	20	55	75			6.7
	1350	450	125.0	23	75	102			7
	1450*	500	138.9	26	75	102			7

Operating table

Model	PRM	Q (m³/h)	100	150	200	250	300	350	400	450	500	580
WP-8	650	H (m)	7.0	6.5	6.0	5.0						
	750*			8.8	8.5	7.5	6.5					
	850			11.5	11.0	10.0	9.0	8.0				
	950*			15.0	14.0	13	12.0	11.0				
	1050			18.5	17.5	16.5	15.5	14.0	13.0			
	1150				21.5	20.3	19.0	18.0	16.5	15.5		
	1250				25.5	24.5	23.0	22.0	20.0	19.0	18.0	
	1350				30.5	29.0	27.8	26.0	25.0	23.0	22.0	
	1450*				35.5	34.0	32.0	31.0	30.0	28.0	26.0	23.0

WP 10

Performance curve

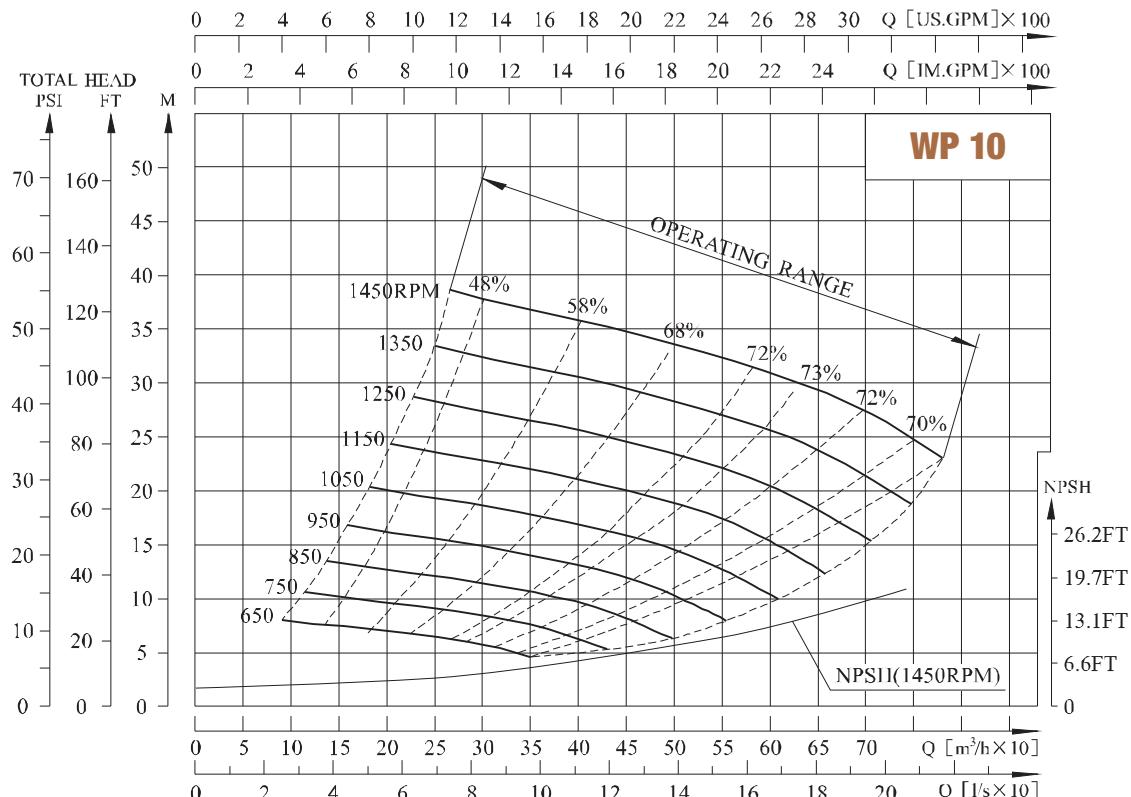

Performance table


Model	PRM	Q		H	Motor		Inlet &Outlet	Max. Solids (mm)	Max. Suction Head (m)
		(m³/h)	(l/s)		(kW)	(hp)			
WP-10	650	250	69	6.5	11	15	250 (10')	76	2.4
	750*	300	83	8.5	15	20			2.7
	850	350	97	11	22	30			3.6
	950*	400	111	13	30	41			4.2
	1050	450	125	16	45	61			5.5
	1150	500	139	19	55	75			6.4
	1250	525	146	23	75	102			6.4
	1350	550	153	27	90	122			6.7
	1450*	600	167	31	90	122			7.0

Operating table

Model	PRM	Q (m³/h)	200	300	400	450	500	550	600	650	700	750
WP-10	650	H (m)	7.0	6.5								
	750*		10.0	8.5	6.0							
	850		13.0	11.5	10.0	8.0						
	950"		16.0	15.0	13.0	12.0	10.0					
	1050		20.0	19.0	17.0	16.0	14.5	12.5				
	1150			23.0	21.0	20.0	19.0	17.5	15.0			
	1250			27.5	25.5	24.5	23.5	22.0	20.5	18.0		
	1350			32.5	30.5	29.5	28.0	27.0	25.5	23.5	21.5	
	1450*			38.0	36.0	35.0	33.5	32.0	31.0	29.5	2.5	24.5

WP 14

Performance curve

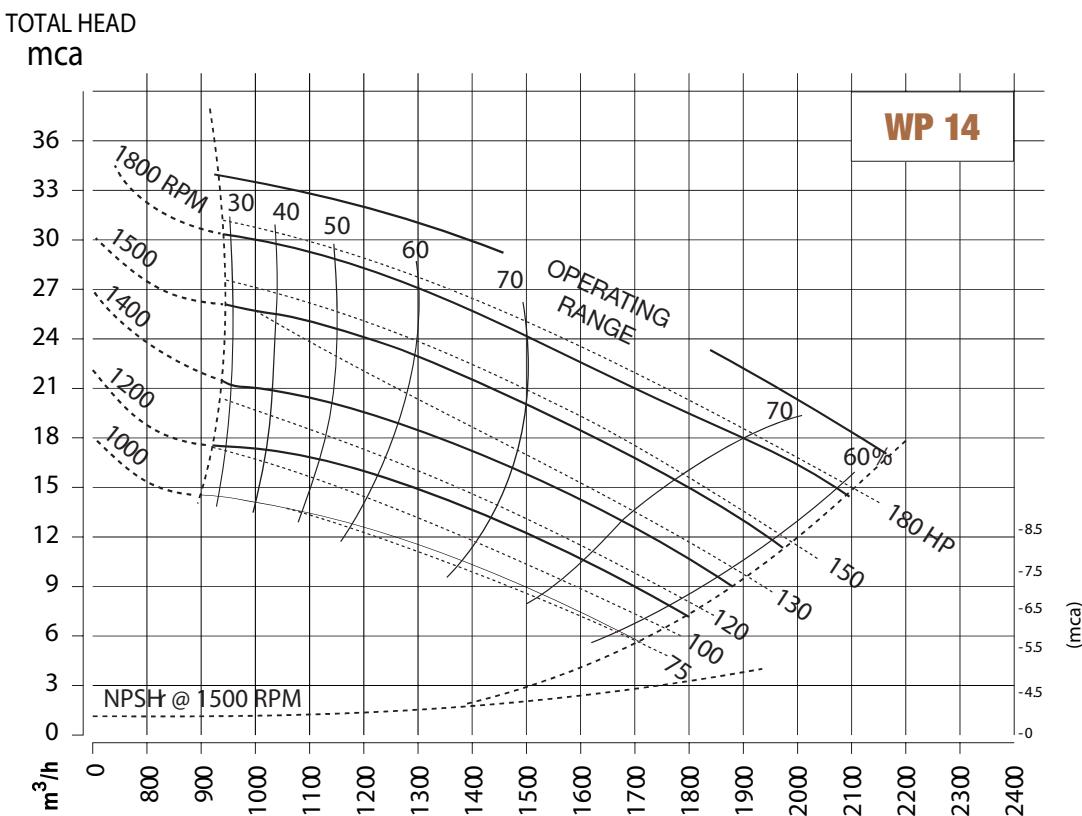

Data Sheet

Net weight: 1.000 kg (2204 lbs)
Shipping weights: 1.070 kg (2359 lbs)
R.P.M.: from 1150 rpm to 1500 rpm
Max. solids: 76,2 mm (3")


Self-priming

1.000 rpm 4,5 (15 ft)
1.200 rpm 4,9 (16 ft)
1.400 rpm 4,9 (16 ft)
1.500 rpm 4,9 (16 ft)
1.800 rpm 4,9 (16 ft)

Numerical values are approximate




Pump profile and installation dimension

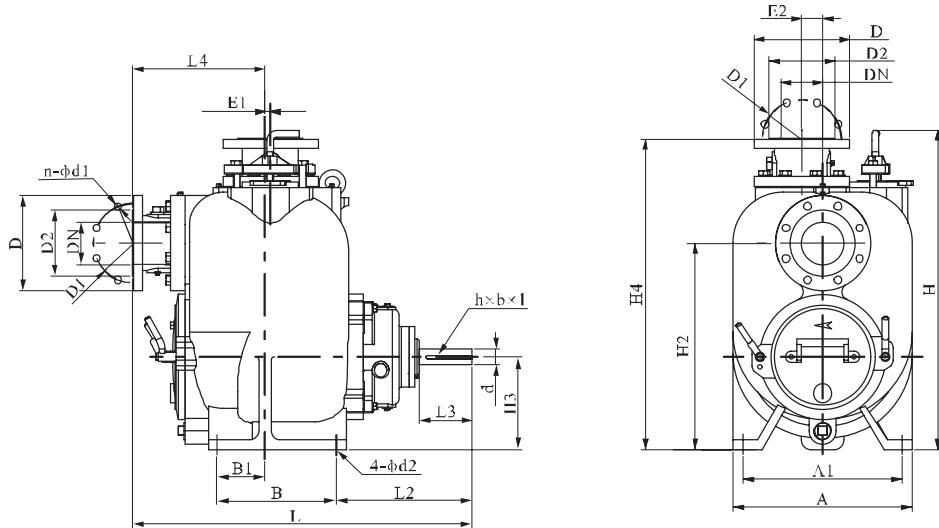


Item		WP-2	WP-3	WP-4	WP-6	WP-8	WP-10
Dimension of Inlet & Outlet Flange DIN (mm)/ ANSI (in)	PN	PN0.6MPa/ Class 150 lb		PN1.0MPa/ Class 150 lb			PN1.6MPa/ Class 150 lb
	DN	50/2'	80/3'	100/4'	150/6'	200/8'	250/10'
	D	140/6'	190/7.5'	228.6/9'	285/11'	340/13.5'	405/15'
	D1	110/4.75'	150/6'	180/7.5'	240/9.5'	295/11.75'	355/14.25'
	D2	90/3.6'	127/5'	158/6.19'	212/8.3'	266/10.62'	320/12.75'
	n-d1	4-14/0.75'	4-19/0.75'	8-19/0.75'	8-23/0.88'	8-23/0.88'	12-26/1'
	hxbxL	10×5×95 0.38"×0.19"×3.74"	10×5×80 0.38"×0.19"×3"	10×5'90 0.38"×0.19"×3.5"	10×5×95 0.38"×0.19"×3.5"	14×3.5×127 0.38"×0.19"×5"	14× 3.5×120
Installation Dimension DIN (mm)/ ANSI (in)	H2	318/12.51'	431.8/17'	495.3/19.5'	574.3/22.61'	723.8/28.5'	639.8/25.19'
	A	308/12.13'	377/14.84'	428/16.85'	580/22.83'	716/28.19'	705/27.75'
	A1	281/11.06'	328/12.91'	373/14.69'	527/20.75'	635/25'	635/25'
	B	163.2/6.42'	228.6/9'	279.4/11'	279.4/11'	304.8/12'	304.8/12'
	B1	54/2.12'	76.2/3'	110/4.33'	77.8/3.06'	101.6/4'	101.6/4'
	L2	274.8/10.82'	285/11.22'	326/12.83'	294/11.57'	407.1/16.03'	320.6/12.63'
	d2	14/0.55'	18/0.71'	18/0.71'	18/0.71'	24/0.88'	24/0.88'
	H3	151.5/5.96'	190.5/7.5'	222.2/8.75'	257.2/10.13'	330.2/13'	355.6/14'
	L3	104/4.09'	102/4.02'	127/5'	127/5'	170/6.69'	123/4.84'
	d	38/1.50'	38/1.5'	38/1.5'	38/1.5'	48/1.75'	48/1.75'
	H	552/21.73'	697.5/27.46'	760/29.92'	875/34.45'	989/38.94'	1017/40.04'
	Am	321/12.64'	389/15.31'	429/16.89'	580/22.83'	716/28.19'	786/30.94'
	H4	502/19.16'	652/25.67'	735/28.94'	887.7/34.95'	1069.3/42.06'	1047.8/41.25'
Profile Dimension DIN (mm)/ ANSI (in)	L	615/24.21'	712.2/28.04'	813.5/32.03'	906.6/35.69'	1023/40.28'	1244.7/49'
	L4	233/9.17'	277/10.91'	318/12.52'	411/16.18'	412.8/16.25'	720.9/28.38'
	E1	27.5/1.08'	15/0.59'	13/0.51'	0	0	0
	E2	70/2.76'	50/2'	50/2'	50/2'	0	0
Wt.	(Kg/lbs)	99/218	190/419	275/606	438/966	655/1445	705/1555

Pump profile and installation dimension

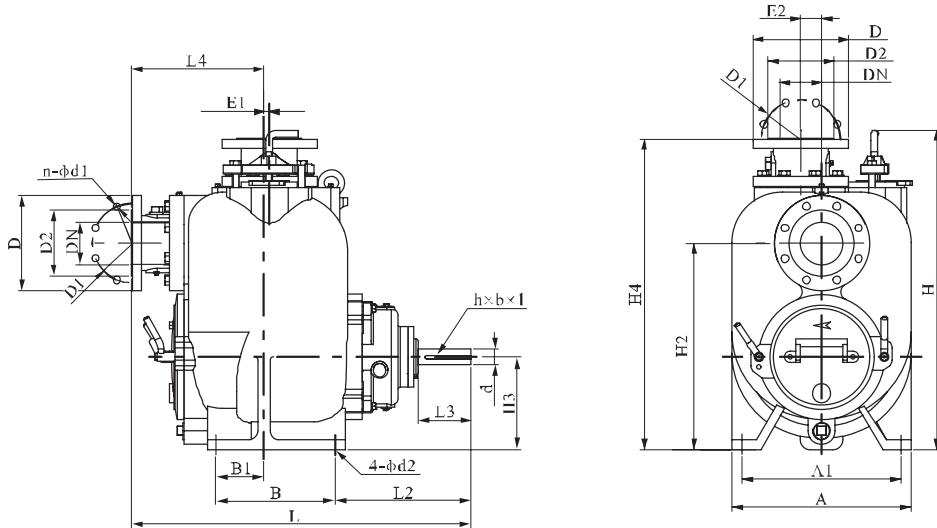

Item		WP-2	WP-3	WP-4	WP-6	WP-8	WP-10
Dimension of Inlet & Outlet Flange DIN (mm)/ ANSI (in)	PN	PN0.6MPa/ Class 150 lb		PN1.0MPa/ Class 150 lb			PN1.6MPa/ Class 150 lb
	DN	50/2'	80/3'	100/4'	150/6'	200/8'	250/10'
	D	140/6'	190/7.5'	228.6/9'	285/11'	340/13.5'	405/15'
	D1	110/4.75'	150/6'	180/7.5'	240/9.5'	295/11.75'	355/14.25'
	D2	90/3.6'	127/5'	158/6.19'	212/8.3'	266/10.62'	320/12.75'
	n-d1	4-14/0.75'	4-19/0.75'	8-19/0.75'	8-23/0.88'	8-23/0.88'	12-26/1'
	hxbxL	10×5×95	10×5×80	10×5'90	10×5×95	14×3.5×127	14×3.5×120
		0.38'×0.19'×3.74'	0.38'×0.19'×3'	0.38'×0.19'×3.5'		0.38'×0.19'×5'	
Installation Dimension DIN (mm)/ ANSI (in)	H2	318/12.51'	431.8/17'	495.3/19.5'	574.3/22.61'	723.8/28.5'	639.8/25.19'
	A	308/12.13'	377/14.84'	428/16.85'	580/22.83'	716/28.19'	705/27.75'
	A1	281/11.06'	328/12.91'	373/14.69'	527/20.75'	635/25'	635/25'
	B	163.2/6.42'	228.6/9'	279.4/11'	279.4/11'	304.8/12'	304.8/12'
	B1	54/2.12'	76.2/3'	110/4.33'	77.8/3.06'	101.6/4'	101.6/4'
	L2	274.8/10.82'	285/11.22'	326/12.83'	294/11.57'	407.1/16.03'	320.6/12.63'
	d2	14/0.55'	18/0.71'	18/0.71'	18/0.71'	24/0.88'	24/0.88'
	H3	151.5/5.96'	190.5/7.5'	222.2/8.75'	257.2/10.13'	330.2/13'	355.6/14'
	L3	104/4.09'	102/4.02'	127/5'	127/5'	170/6.69'	123/4.84'
	d	38/1.50'	38/1.5'	38/1.5'	38/1.5'	48/1.75'	48/1.75'
	H	552/21.73'	697.5/27.46'	760/29.92'	875/34.45'	989/38.94'	1017/40.04'
	Am	321/12.64'	389/15.31'	429/16.89'	580/22.83'	716/28.19'	786/30.94'
	H4	502/19.16'	652/25.67'	735/28.94'	887.7/34.95'	1069.3/42.06'	1047.8/41.25'
Profile Dimension DIN (mm)/ ANSI (in)	L	615/24.21'	712.2/28.04'	813.5/32.03'	906.6/35.69'	1023/40.28'	1244.7/49'
	L4	233/9.17'	277/10.91'	318/12.52'	411/16.18'	412.8/16.25'	720.9/28.38'
	E1	27.5/1.08'	15/0.59'	13/0.51'	0	0	0
	E2	70/2.76'	50/2'	50/2'	50/2'	0	0
Wt.	(Kg/lbs)	99/218	190/419	275/606	438/966	655/1445	705/1555

Profile and installation dimension of coupled pump set

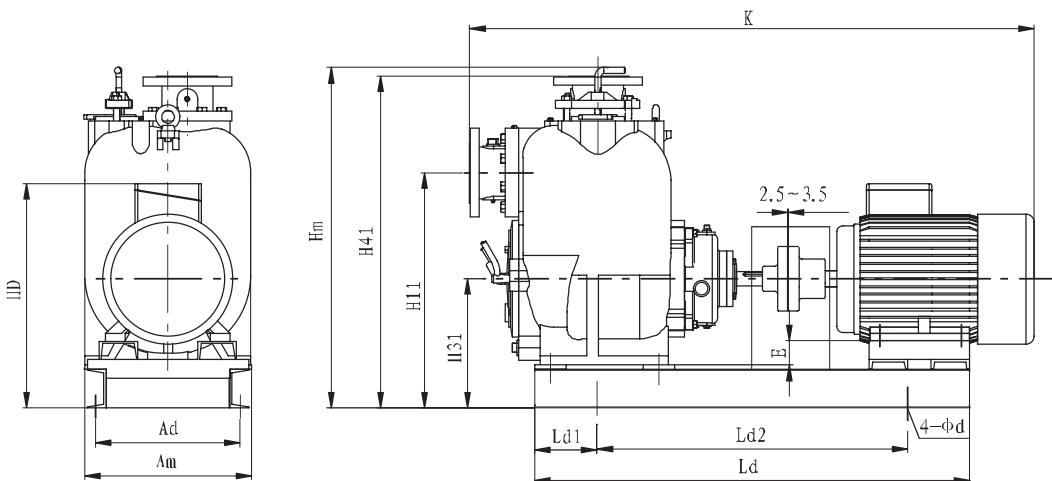

Model	Motor		Dimensions							Dimensions					
	Power (kW)	Model	Ad	Ld1	Ld2	d	H11	H31	H41	K	Am	Hm	HD	E	Ld
WP-2 (1450)	1.5	Y2-90L-4	300	77.5	617	20	428	261.5	612	986	341	662	416.5	61.5	772
WP-2 (2900)	9.2	02-1325-2	300	77.5	695	20	428	261.5	612	1110	341	662	471.5	19.5	850
WP-3 (750)	1.5	02-1128-8	330	120	621	20	541.8	300.5	762.2	1134	370	800	490.5	78.5	861
WP-3 (950)	1.5	Y2-100L-6	330	120	614	20	541.8	300.5	762.2	1119	370	800	480.5	90.5	854
WP-3 (1450)	5.5	Y2-132S1-4	330	120	660	20	541.8	300.5	762.2	1204	370	800	510.5	58.5	900
WP-4 (750)	1.5	02-1128-8	370	150	663	20	605.3	332.2	843.6	1236	430	887.3	522.2	110.2	963
WP-4 (950)	3	02-1325-6	370	150	702	20	605.3	332.2	843.6	1306	430	887.3	542.2	90.2	1002
WP-4 (1450)	11	Y2-160M-4	370	150	821	20	605.3	332.2	843.6	1451	430	887.3	587.2	62.2	1121
WP-6 (750)	4	02-16081-8	510	150	784	20	710.3	393.2	1023.7	1544	590	1024	648.2	97.2	1084
WP-6 (950)	7.5	Y2-160M-6	510	150	784	20	710.3	393.2	1023.7	1544	590	1024	648.2	97.2	1084
WP-6 (1450)	30	Y2-200L-4	510	150	905	20	710.3	393.2	1023.7	1705	590	1024	698.2	57.2	1205
WP-8 (750)	11	52-180L-8	640	150	1050	24	904	510.2	1250	1767	716	1250	790	150.2	1350
WP-8 (950)	22	Y2-200L2-6	640	150	1085	24	904	510.2	1250	1769	716	1250	815	130.2	1385
WP-8 (1450)	75	02-2805-4	640	150	1264	24	904	510.2	1250	2012	716	1250	1020	50.2	1564
WP-10 (750)	15	02-200L-8	640	150	1050	24	820	535.6	1227.8	2020	786	1228	880.6	155.6	1350
WP-10 (950)	30	02-2258-6	640	150	1050	24	820	535.6	1227.8	2095	786	1228	865.6	130.6	1350
WP-10 (1450)	90	02-2808-4	640	150	1240	24	820	535.6	1227.8	2285	786	1228	935.6	75.6	1540


BE
PUMPING
PARTNERS

www.alphodynamic.eu

AlphaDynamic Pumps SA

Production Plant - Greece
Inofita Industrial area
59th km Nat.Road Athens - Lamia
GR 320 11 Inofita Viotia, Greece

Tel +30 215 215 9520 , +30 215 215 9580
Email: Sales@alphodynamic.eu



We Make The Difference

hydroo®